




**Instal Signals**  
Y2, Y3A, Y3B, X3, X4  
**Instal ST at 2 Locations**

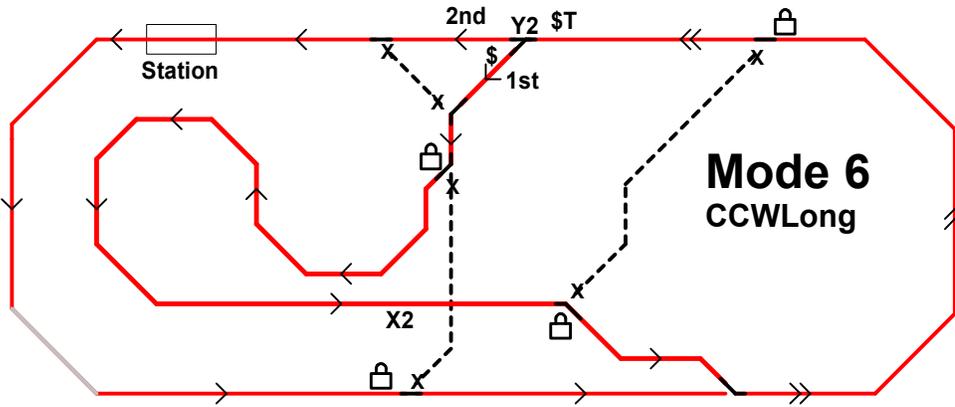

**Instal Signals**  
Y2, X2  
**Instal \$T at 1 Location**

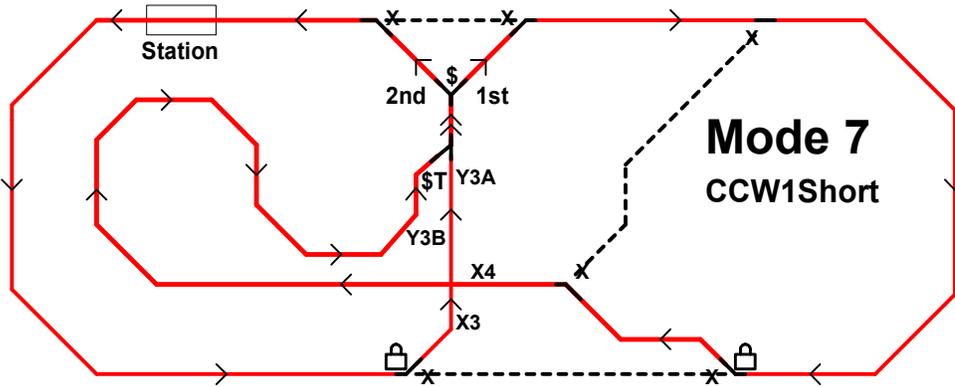

**Instal Signals**  
Y3A, Y3B, X3, X4  
**Instal \$T at 1 Location**

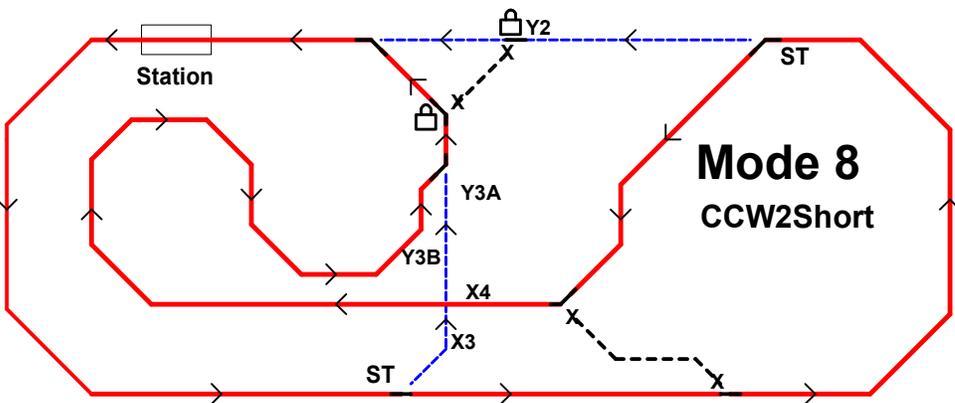

**Instal Signals**  
Y2, Y3A, Y3B, X3, X4  
**Instal ST at 2 Locations**

ST: Switch Stand locations that permit optional routing.

\$/ST: Switch must be thrown by the engineer selecting route 1 first pass and route 2 second pass.

◇ = Permissible Route Travel Directions

≡ = Route section Travelled Twice

--- = Allowed Optional Route. Turnout must be restored to Mainline.

X---X = Closed Track, Do Not Enter

🔒 = Turnout locked in position, no Switch Stand.

Title <b>CCW Modes 5- 8</b>		
Author G. Slobodzian Kitsap Live Steamers		
File ts\KLS\Signal System\Wiring\CCWroutes 5 8.dsn	Document	
Revision 1.1 3/19/21	Date	Sheets 1 of 1